



Cubicle system BASIC



BASIC At a glance

KEMMLIT For every demand	2
BASIC type C Extremely sturdy made of HPL	4
BASIC type D Low cost made of particle board	6
BASIC type E Elegant made of steel sheet	8
BASIC Planning aid	10
BASIC Colour concept	10
KEMMLIT Our promise	11

KEMMLIT For every demand

As market leader for washroom cubicles, KEMMLIT offer a variety of high class solutions ranging from cubicles and lockers to entire washrooms. Everything we do is based on a clear commitment to the highest quality regarding products,

our consulting service and installation. What sets us apart is qualified know-how, state-of-the-art manufacturing and innovative design. For these reasons we have received numerous prizes and awards within the last few years.

What can we do for you?

For further information:
www.kemmlit.de/basic
Status 03/2019



kemmlit.de

BASIC type C Extremely sturdy made of HPL



Type C-BASIC is ideal for both wet and dry areas with high stability, durability and hygiene requirements.

The unique static interconnection of aluminium sections as well as the high-quality fittings are characteristic for this system. The headrail consists of an extremely sturdy three-chamber stabiliser. All screw connections are solid. This guarantees continuous and trouble-free performance.

Panels and doors are made of 13 mm, water-resistant, solid grade laminate HPL panels with machine-milled edges. The panels are therefore scratch-, wear- and abrasion-resistant.

The aluminium supporting legs with stainless steel core have a solid nylon cover sleeve and a height-adjustable mechanism to compensate for tolerances in floor level of up to 30 mm.

The milled from the solid aluminium lock cover plate with sturdy zinc diecast lock is user-friendly and prevents material fatigue.


The sturdy three-roller edge hinges made of aluminium feature maintenance-free bearing bushes and are screwed hidden from sight to the face of the panel. Also available with finger protection!

All doors can be installed either with automatic closing or opening. End-to-end rubber buffers in the doorstop profiles ensure quiet closing. In addition BASIC type C meets the requirements according to DGNB and therefore contributes to your buildings certification.



Areas of application

- schools
- universities
- industrial buildings
- administration buildings
- hospitals
- sports- and leisure centres
- camp sites
- hotels
- restaurants
- public facilities

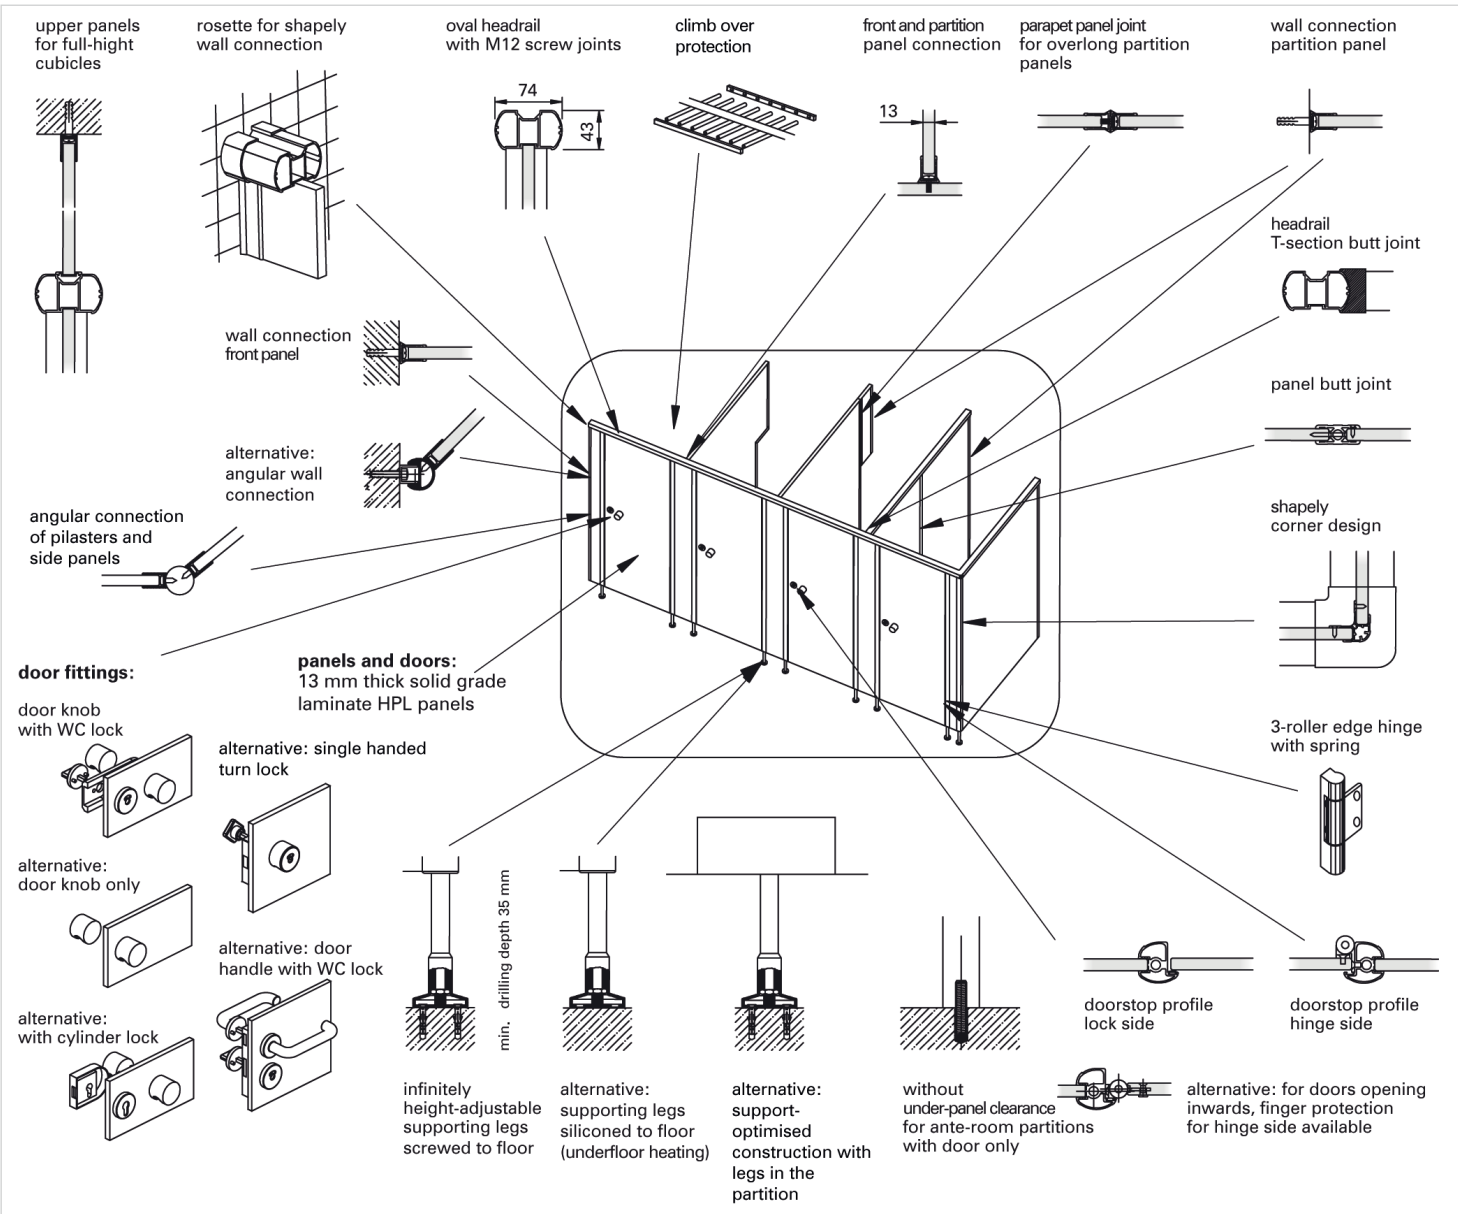

BASIC type D Low cost made of particle board



Type D-BASIC is the low-cost solution for dry areas where quality, stability and harmonising design are essential.

Panels and doors are made of 30 mm sturdy, formaldehyde-free, high-density melamine resin-coated particle board. The surface of the panels consists of directly applied melamine resin coating. The edges have a protective ABS-lipping.

All profiles are made of high-quality aluminium. The furniture is shapely integrated into doors and panels. The warp-resistant headrail guarantees long-lasting stability.

Specially developed for high requirements, the 2-roller edge hinges made of aluminium feature a maintenance-free bearing bush.

The door handles made of impact resistant nylon with metal core, or alternatively aluminium, with WC lock and metal bolt are extremely robust. As an option, door knobs with hinges for self-closing doors can be installed.

The supporting legs have a solid cover sleeve and are infinitely height-adjustable to compensate for tolerances in floor level of up to 30 mm. The supporting legs are available either completely made of stainless steel, or satin anodised aluminium with flat cover sleeve or with nylon cover sleeve.


BASIC type D also meets the requirements according to DGNB and therefore contributes to your buildings certification.



Solid



Low-cost




Speedy delivery



KEMMLIT greenline

Areas of application

- industrial buildings
- administration buildings
- restaurants
- hotels
- public facilities
- schools

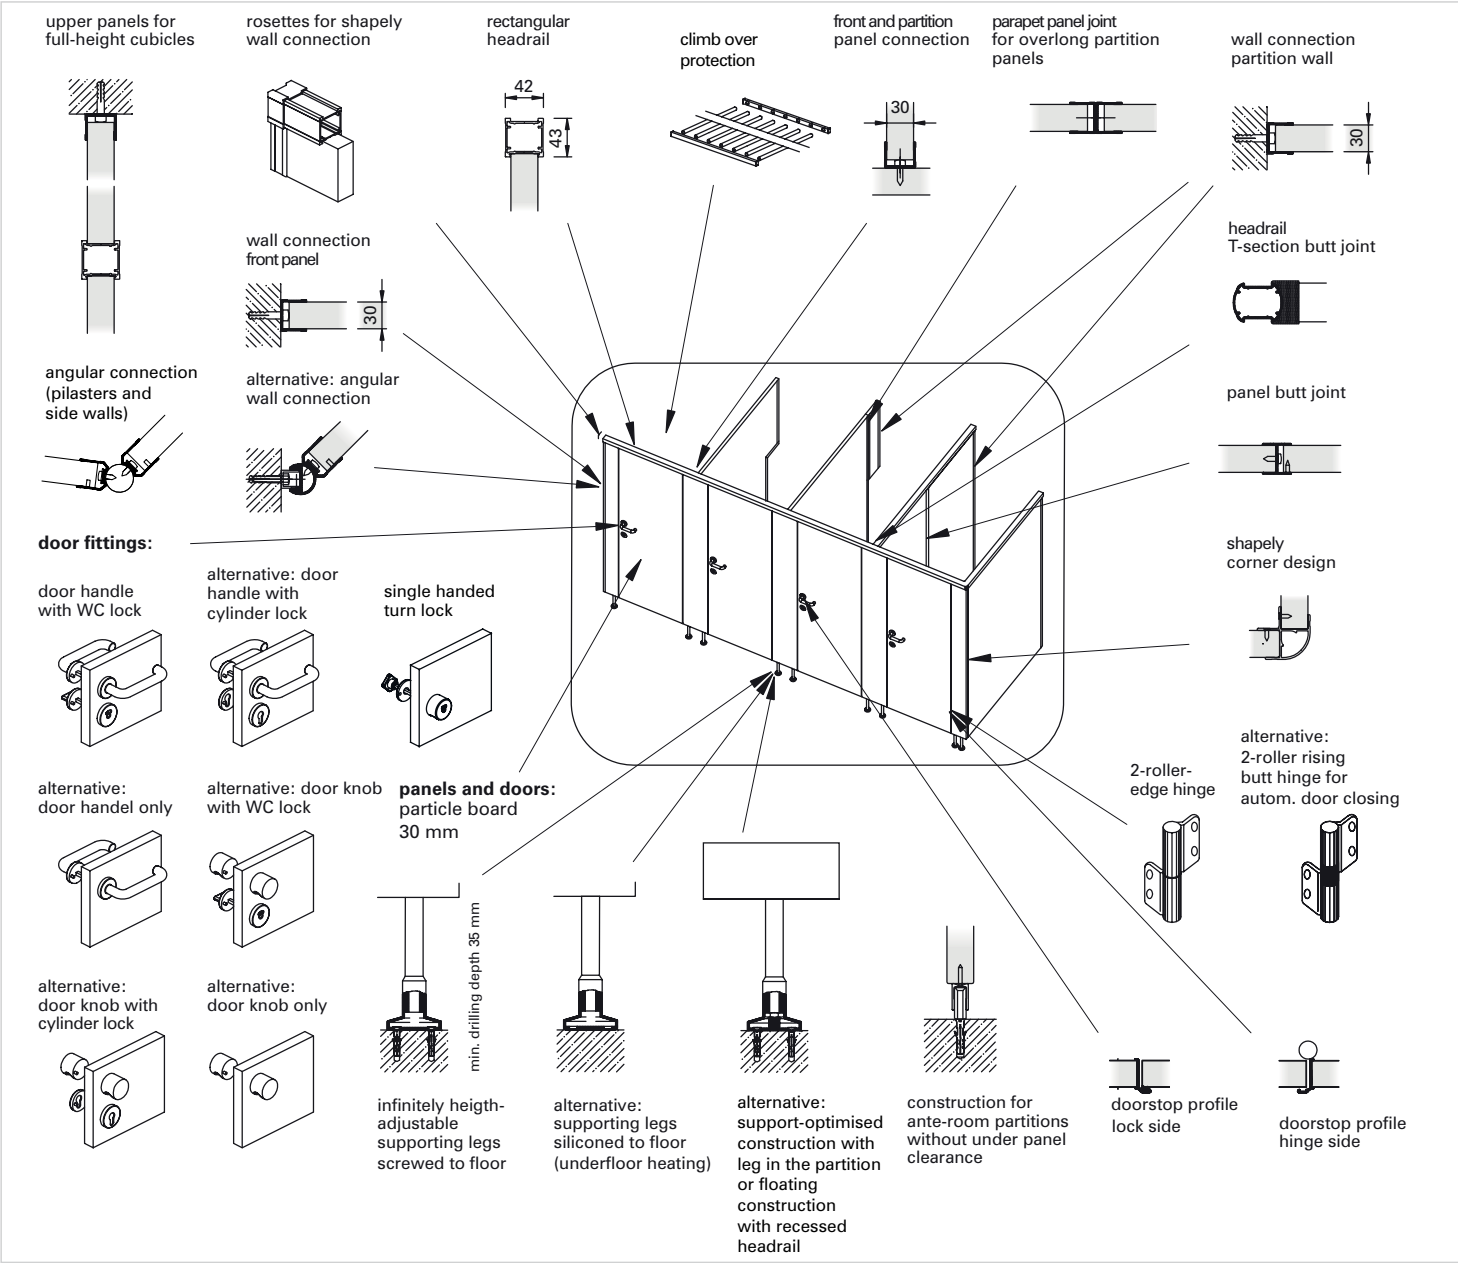

BASIC type E Made of steel sheet



Type E-BASIC is an aesthetically beautiful cubicle system for both wet and dry areas. Panels and doors consist of 30 mm sheet steel composite elements.

This specially developed construction combined with the core inlay ensures extrem robustness and rigidity. This guarantees long life expectancy.

The exceedingly sturdy steel-sheets with material thickness of 0,6 mm have very good corrosion protection. Both sides are hot-dip galvanized and have an additional special protective coating on the inside. The outside is protected by a sturdy polyester coating thus ensuring immaculately hygienic cleaning.

All profiles are made of high-quality aluminium. The furniture is beautifully integrated into doors and panels. The warp-resistant headrail guarantees long-lasting stability.

2-roller rising butt hinges with maintenance-free bearing bush are ideally suited for either automatic closing or opening of the doors.


The door knobs made of impact resistant nylon or alternatively aluminium with WC-lock and metal bolt are extremely sturdy. As an option, door handles are available.

All supporting legs are infinitely height-adjustable to compensate for deviations in floor level of up to 30 mm. All constructive components are made of corrosion-free aluminium or rust-proof stainless steel.



Areas of application


- universities
- industrial buildings
- administration buildings
- hospitals
- camp sites
- hotels
- restaurants
- public facilities

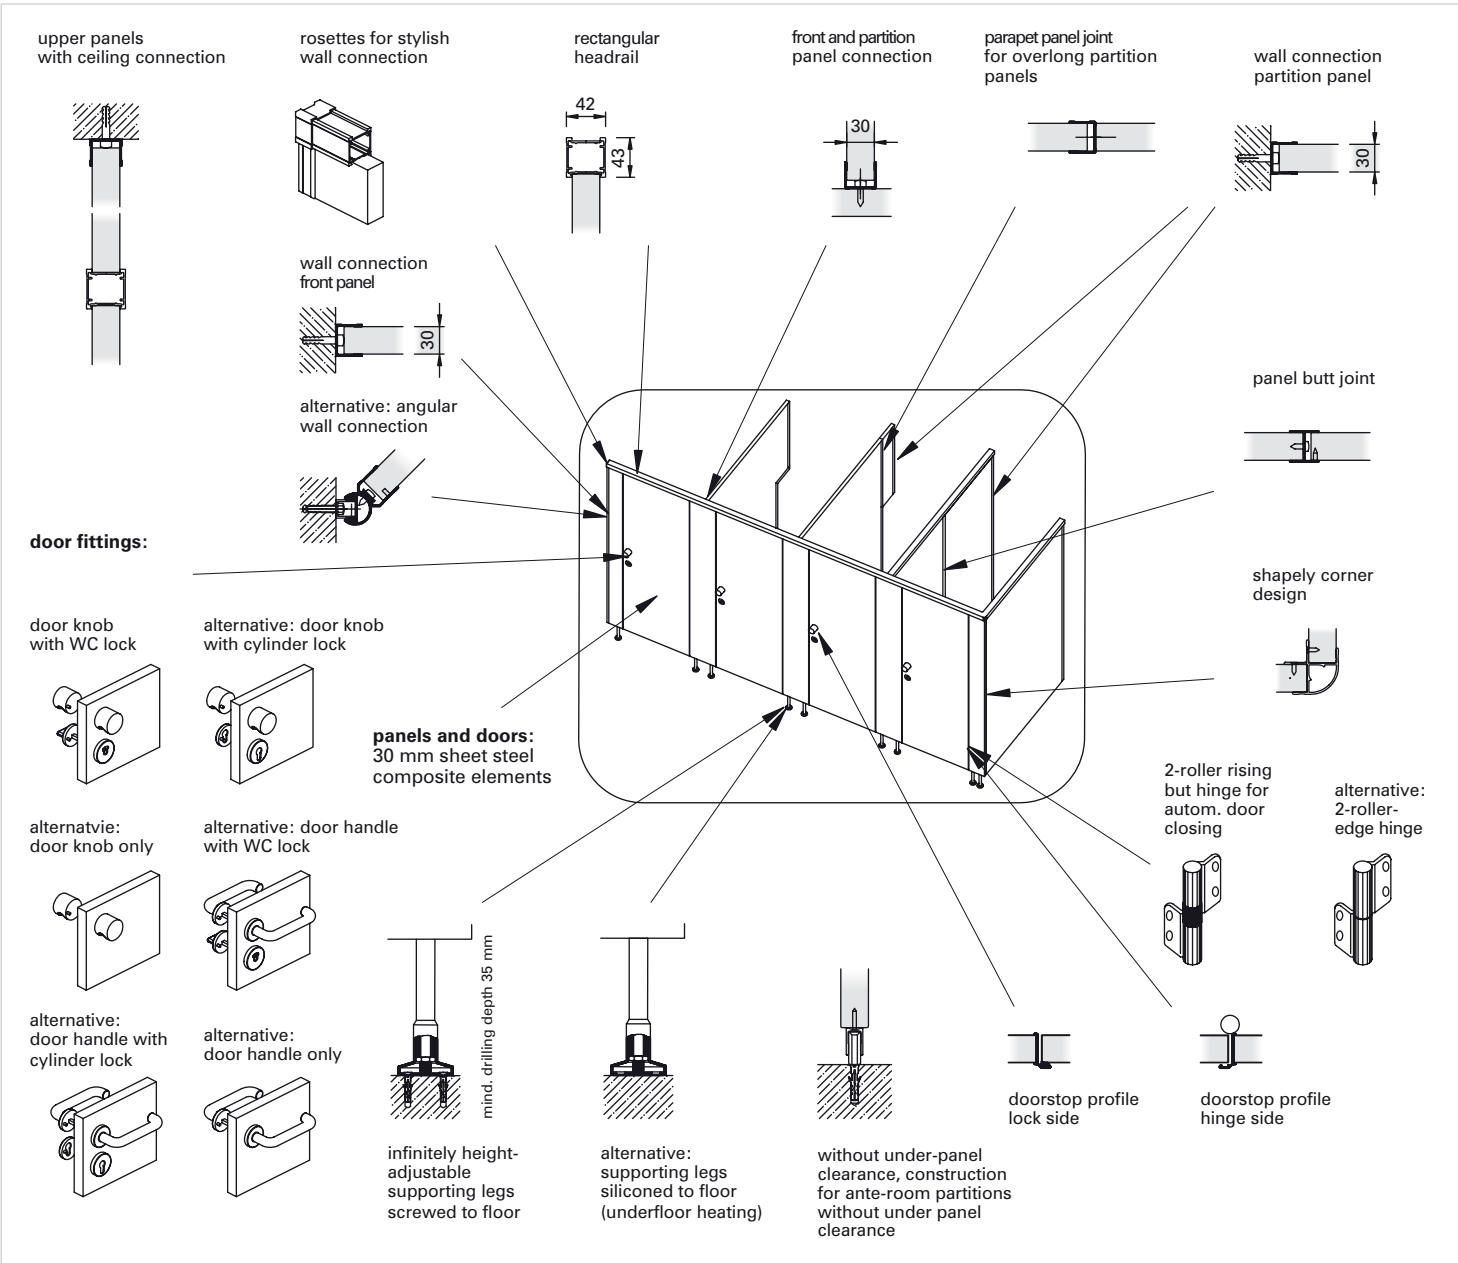

BASIC Planning aid



Features	Construction
Compliance	TÜV-approved, GS tested safety
Cubicle height	2000 mm panels and doors, as an option 2135 mm
Upper panel	max. 2650 mm room height
Under panel clearance	150 mm, adjustable +25 / -5 mm
Door width (nominal size)	570 mm type C 640, type E 620, type D 650 750 mm 980 mm
Cubicle depth	up to 2000 mm, standard 1500 mm (from 1601 mm with leg and joint in the partition)
Floor plan	range of cubicles or diagonal cubicles (see drawing)
Anteroom partition	without under-panel clearance, height: 2000 mm with upper panel up to 2650 mm
Urinal screens	- Standard urinal screen 435 x 825 mm - Urinal screen with supp. leg 435 / 600 x 1475 mm incl. 150 mm under panel clearance
Modesty-screens	with supporting leg 600 mm x 2000 mm including 150 mm under panel clearance

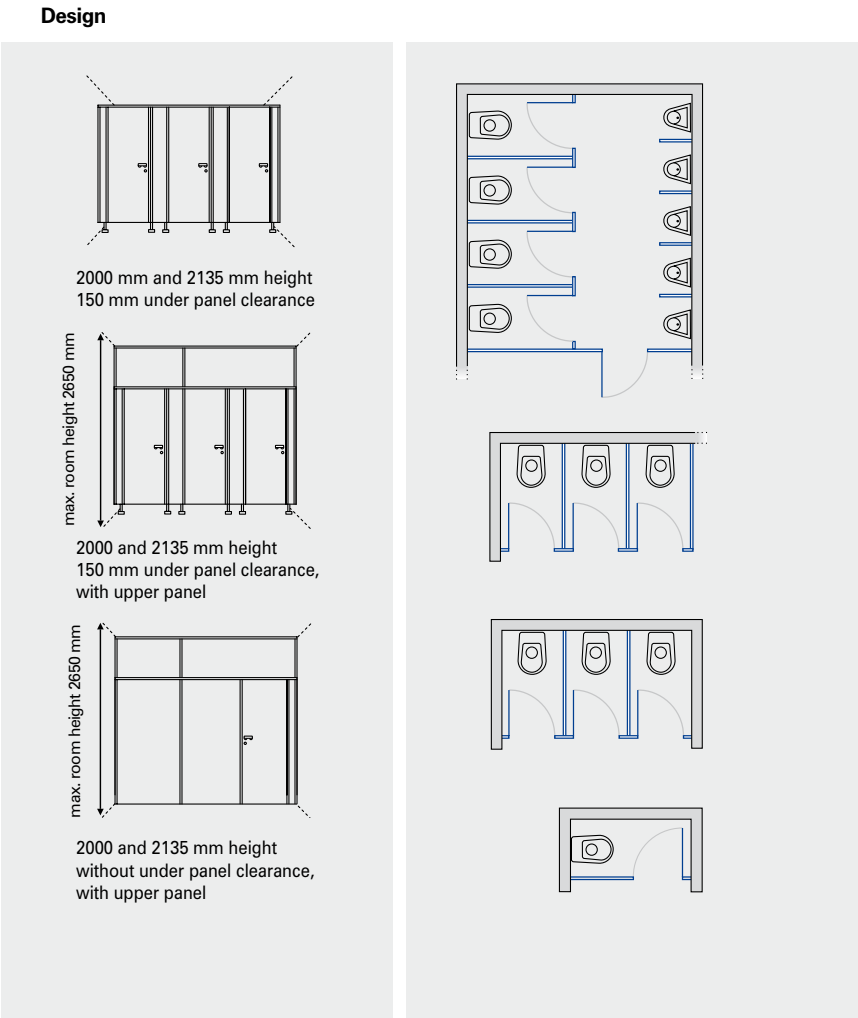

Please refer to our representative in your vicinity for specification sheets or visit our website at www.kemmlit.com

subject to technical changes 03/2019

BASIC Colour concept

Panels and doors made of HPL / particle board:

Traffic white 9317 similar to NCS S 0502-G50Y	Granite white 9317 P	Light grey 7208 similar to NCS S 2500-N
Quartz grey 7708 similar to NCS S 5000-N	Graphite 7808 similar to NCS S 7502-B	Lagoon blue 5408 similar to NCS S 1030-R90B
Tornado red 3508 similar to NCS S 0580-Y90R	Corn yellow 1708 similar to NCS S 1070-Y10R	Lemon green 6715 similar to NCS S 1060-G60Y

Panels and doors made of steel sheet:

Traffic white 9317 similar to RAL 9016
Light grey 7208 similar to RAL 7035

Profiles, hinges, furniture, ABS-lipping, supporting legs and accessories:

White 02 similar to RAL 9016	Manhattan 05 similar to NCS 2801-Y36R	Anthracite 03 similar to RAL 7043	Red 11 similar to RAL 3003
Dark blue 04 similar to RAL 5003	Yellow 10 similar to RAL 1023	Satin anodised 08 ¹ (Profiles, hinges, furniture, accessories) similar to E6 / EV1	Stainless steel V2A 12 ² (only legs and accessories)

Colour concept valid from 07/2017

¹ Surcharge for furniture and supporting leg flat cover sleeve
² Surcharge for profiles, hinges, furniture and supporting legs

Please note, that the colours shown above may slightly differ from the original colour due to typographic reasons. We would gladly advise you personally.

KEMMLIT Our promise



ON-TIME INSTALLATION

98% of all requested delivery dates can be fulfilled



FASTEST PRODUCTION & INSTALLATION

Prompt and on-schedule delivery



IMMEDIATE REPAIR

Immediate repair when you need it



HIGHEST PRODUCT QUALITY

Top quality in terms of material and processing



WE ARE IN YOUR VICINITY

Individual consulting service by professional sales representatives



KEMMLIT-Bauelemente GmbH | Maltschachstraße 37 | D-72144 Dusslingen
Tel.: +49 (0) 7072 /1 31-0 | info@kemmlit.de | kemmlit.de